

ATH-Frame Lift 30FZ | 30FZ UG

- High-quality and robust double scissor lift with hydraulic drive, almost maintenance-free
- Powerful hydraulic unit with load-dependent lowering valve
- Very low drive-over height of only approx. 105 mm
- Suitable for installation and use on the floor and optional floor-level installation (in ground kit)
- Synchronization control via double master and slave systems, safety light barriers and double hydraulic lines
- Full lifting power from the lowest point due to mechanical swivel system
- Emergency lowering system for lowering in the event of a power failure, CE-Stop and acoustic lowering signal
- Ideally suited for paint and body shops, repairs, brake and tire services

Technical details

Rated load capacity	3t
Lifting height max.	1.900 mm
Drive-on-height	105 mm
Total platform length	1.495–2.030 mm
Total platform width	600 mm
Motor power	2,6 kW
Lifting/Lowering time	approx. 50 s
Power supply voltage	3x 400V / C16A
Concrete strength	min. C20/25 2.500x2.500x 180 mm



Partial galvanizing incl. powder coating



Item number: HUK2200

Underfloor kit included
at Frame Lift 30FZ UG

Lockable
Access flaps



Accessories



User manual



Spare parts



Augmented
Reality / 3D



Service

PDF Product flyer

Item number

ATH-Frame Lift 30FZ

630311

PDF Product flyer


Item number

ATH-Frame Lift 30FZ UG

630322

ATH-Frame Lift 30FZ | UG

Item number: 630311 30FZ | 630322 30FZ UG

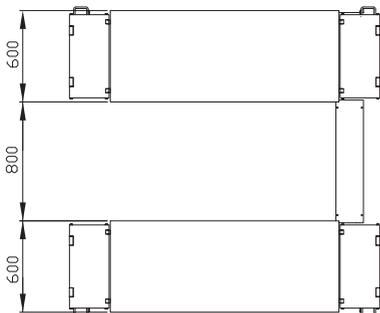

Installation

