


ATH-Comfort Lift 2.35XL | 2.40XL


- Electro-hydraulic 2-post lift with quick lift unit and load-dependent lowering function
- Two control units for flexible use on both columns
- Energy set (230V / compressed air / 12V) on the main post
- Safety Control: Electromagnetic safety locks that automatically unlock with lifting and lowering
- Safety Lock: ability to lock the load on to the safety mechanism
- Multifunctional mounting via 3-part support arms and double telescopic support plates
- Cross member on top with hydraulic hose and synchronized cables

Technical details

Rated load capacity	3,5t 4t
Lifting height max.	2.000 mm
Drive-through width	2.500 mm
Overall width	3.542 mm
Support arms parts	3 3
Motor power	3 kW
Lifting/Lowering time	approx. 30 s
Power supply voltage	3x 400V / C16A
Concrete strength	min. C20/25 4.000 x 2.000 x 200 220 mm

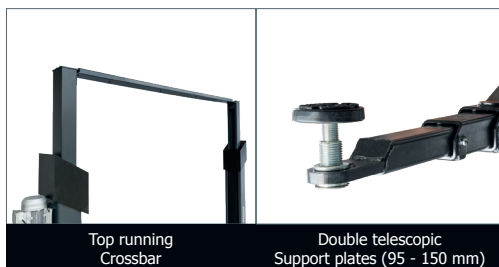


Accessories



User manual



Spare parts



Augmented Reality / 3D



Service

PDF Product flyer

Item number

ATH-Comfort Lift 2.35XL

622205

PDF Product flyer

Item number

ATH-Comfort Lift 2.40XL

622207



ATH-Comfort Lift


Item number: 622205 | 622207
ATH-Comfort Lift: 2.35XL | 2.40XL




ATH-Lifting




Installation



2.35XL



2.40XL

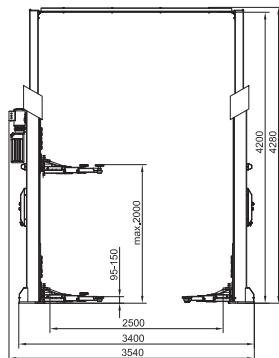

ATH-Heinl GmbH & Co. KG | Gewerbepark 9
D-92278 Illschwang | Germany | www.ath-heinl.com

Status: October 2022. Errors and mistakes excepted. Sale only through ATH distributors.



INDEX

